

# Panasonic IP Telephone System KXTD100/200


## Programming Time & Date, and Speed Dial number and Name

### 3.3 Customising Your System (System Programming)

#### ◆◆ Procedure

The basic steps are shown below.

#### 1. Entering the programming mode

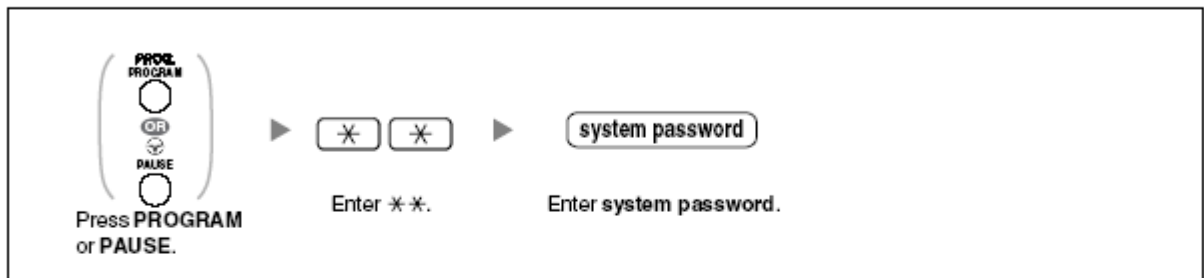


#### 2. Programming

You can enter each programme number (3 digits).



- To exit the programming mode at any time, lift the handset.

#### 3. Exiting the mode

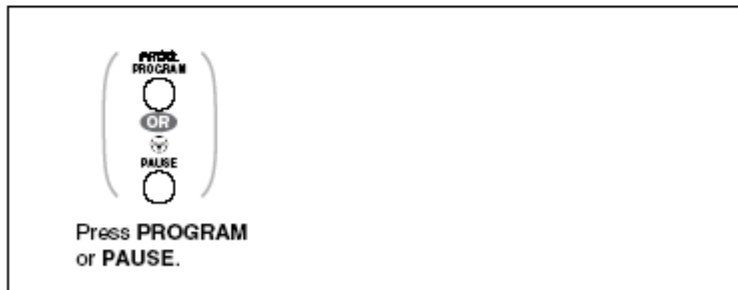


- To exit the programming mode at any time, lift the handset.


### 3.3.2 System Programming

#### ◆◆ Date & Time [000]

The proprietary telephones display the current date and time while on-hook.  
 [In 12-hour Format]

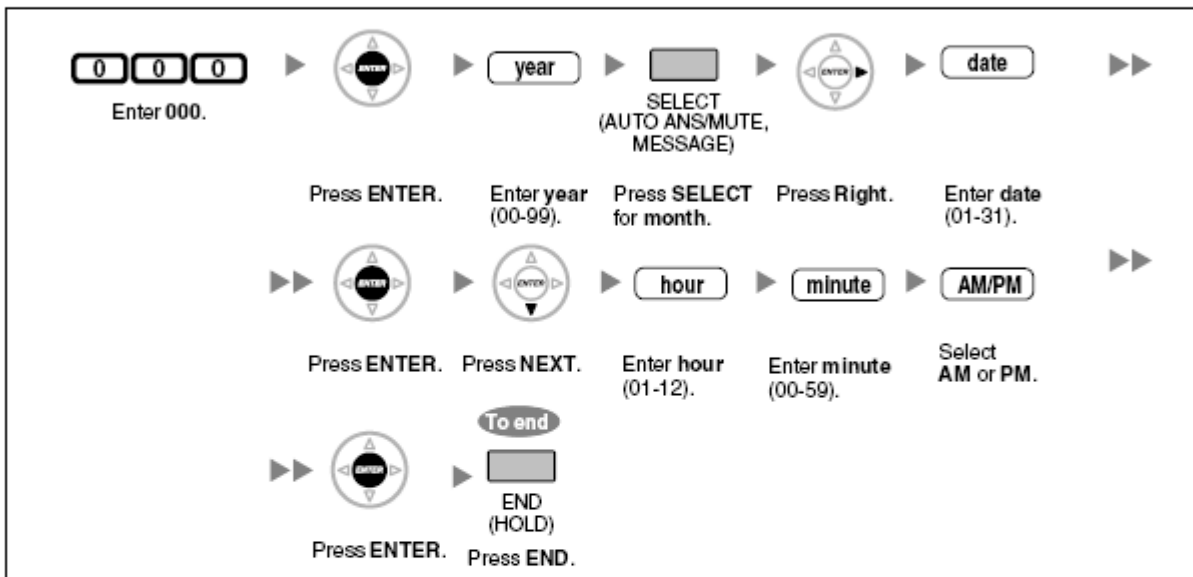

[In 24-hour Format]

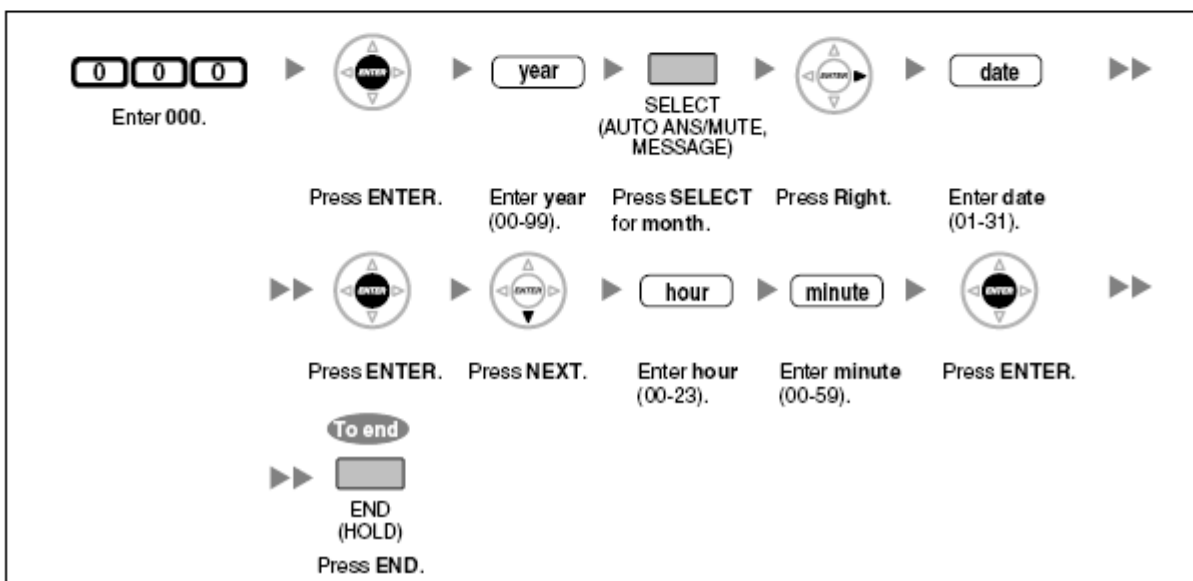




- After changing the desired values, you can press the ENTER button. You do not have to perform the rest of the steps.
- The clock starts immediately after the ENTER button is pressed.
- You cannot leave a value empty.
- You can clear the entry by pressing the CLEAR button.
- To confirm your entry after storing data:
  - The STORE button light: Lights red.
  - Confirmation Tone:
    - One beep: Your entry is accepted.
    - Three beeps: Your entry is rejected.


### ◆◆ System Speed Dialling Number [001]

You can store the phone numbers of frequently dialled numbers.

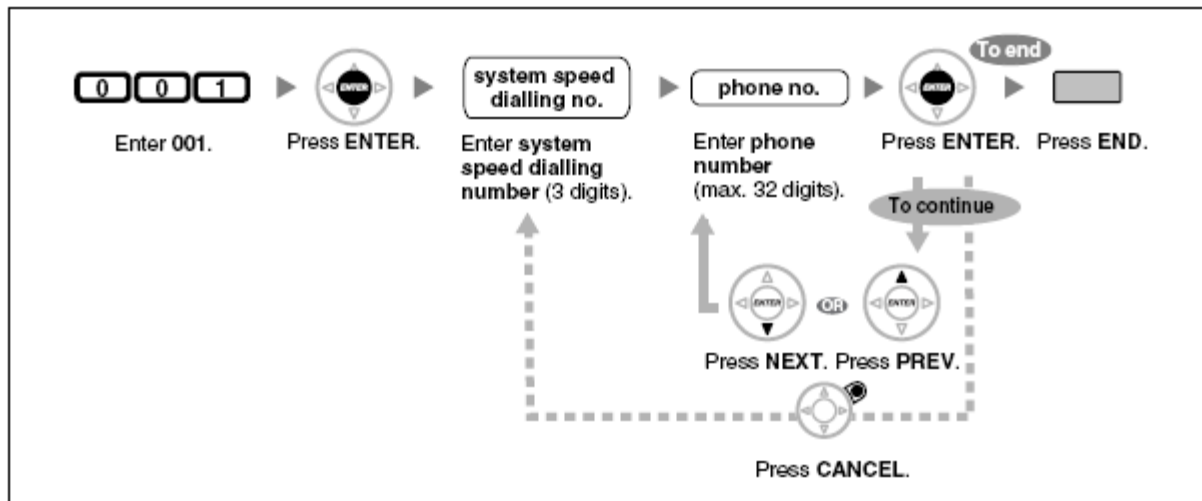


- If the desired number is more than 32 digits, divide the number and store it into a speed dialling number.
- "\*", "#", FLASH/RECALL, PAUSE, and SECRET (INTERCOM) can also be stored. If you do not want to display the stored number when making a call, press the SECRET (INTERCOM) button before and after the numbers you wish to conceal. If you store an outside party's number, you should first store a line access number. If you need to enter an account code, you can enter the specified account code before the line access number.

<Example>

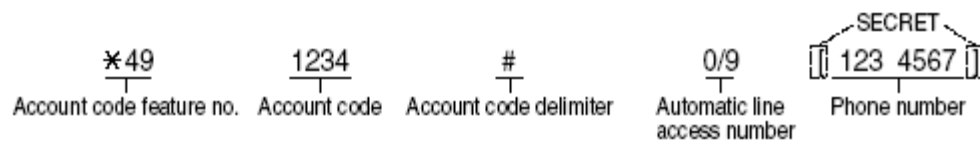


### ◆◆ System Speed Dialling Name [002]

You can store the name associated with the speed dialling number. These names are displayed when making calls using the display operation. To enter characters, refer to "Entering Characters".

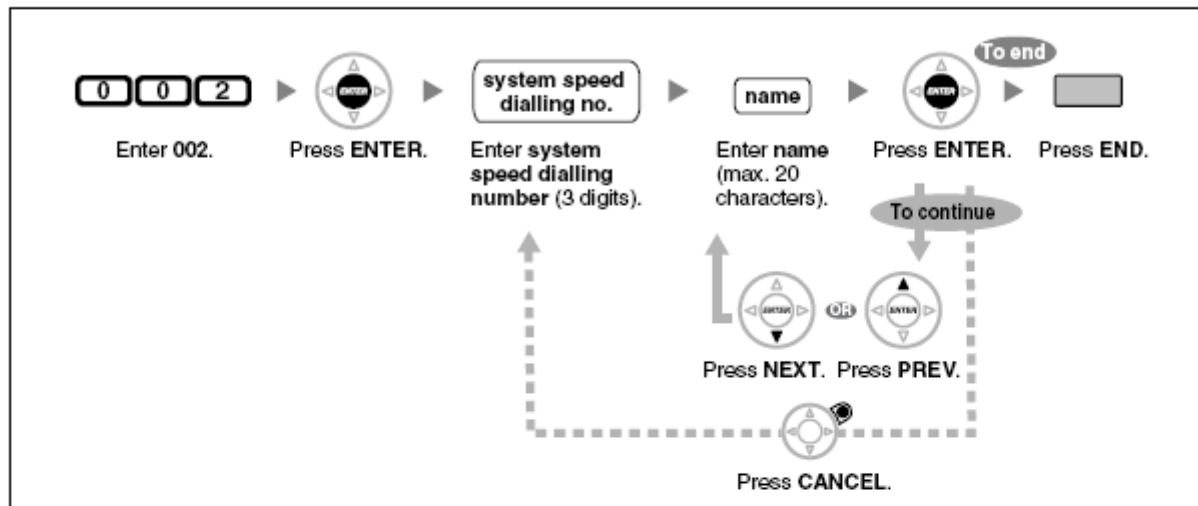

### ◆◆ Extension Number [003]

You can assign an extension number to each extension.

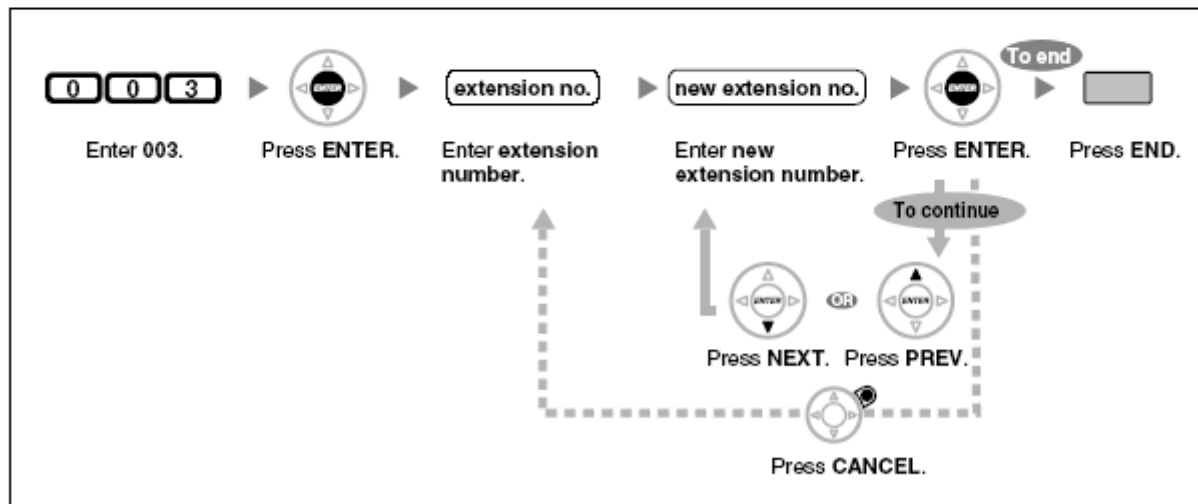

- The leading number(s) should be the same as the number(s) assigned for Flexible Numbering. Consult your dealer.
- A duplicate entry is invalid.